
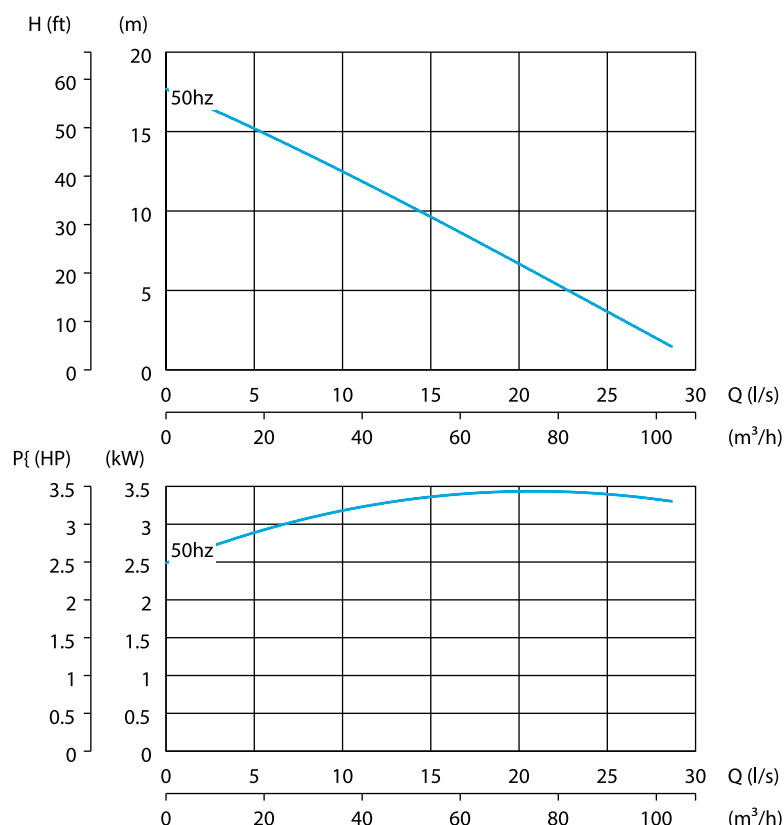


## BRAVO 200



8146.020

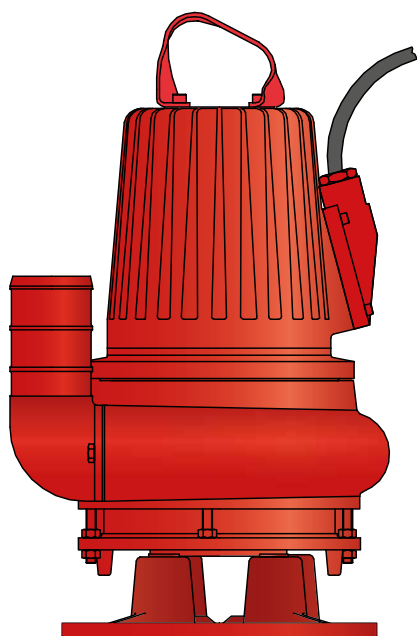

Technical Data 50 Hz	Bravo 200
Discharge connection	4"
Rated power P2	4.7 kW
Max. power consumption P1	5.7 kW
Shaft speed	1445 rpm
Rated current at 230V	17 A
Rated current at 400V	9.6 A
Rated current at 500V	7.7 A
Solids passage	50 mm
Height	760 mm
Diameter	460 mm
Weight	157 kg

## BRAVO 300



8147.020

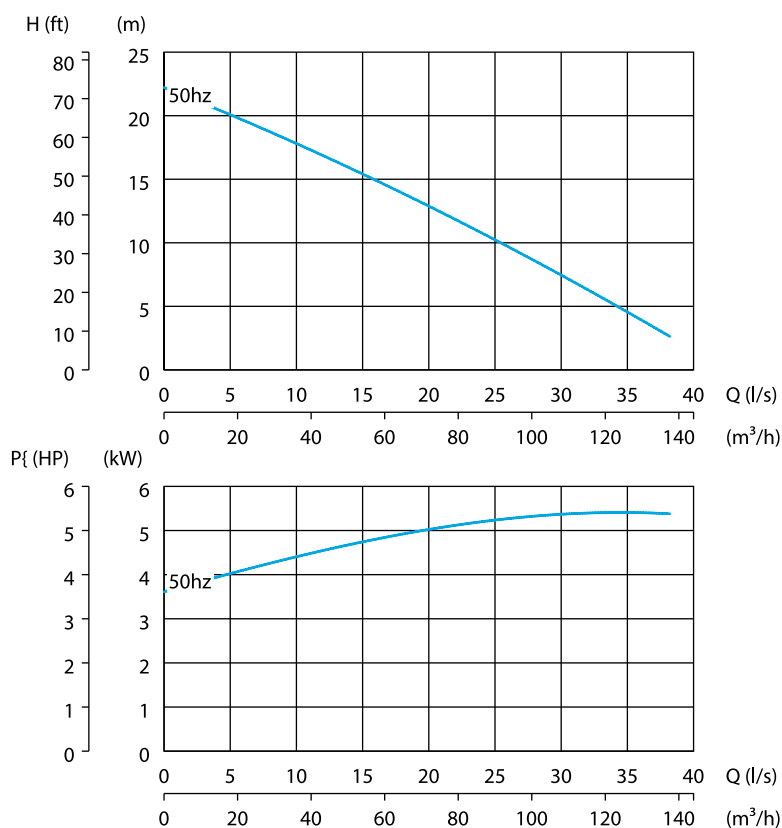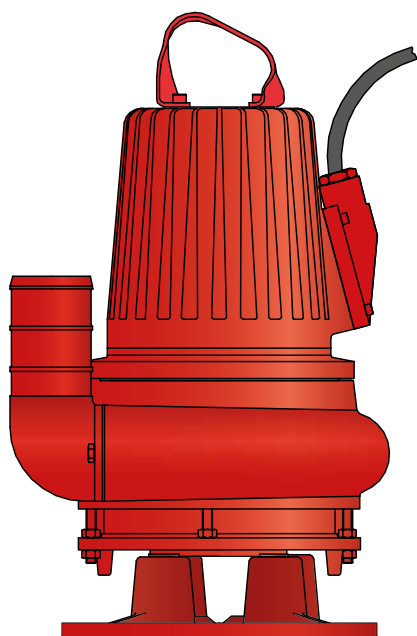

Technical Data 50 Hz	Bravo 300
Discharge connection	4"
Rated power P2	5.9 kW
Max. power consumption P1	7.1 kW
Shaft speed	1450 rpm
Rated current at 230V	21 A
Rated current at 400V	12 A
Rated current at 500V	9.5 A
Solids passage	50 mm
Height	760 mm
Diameter	460 mm
Weight	157 kg

## BRAVO 400



8148.020

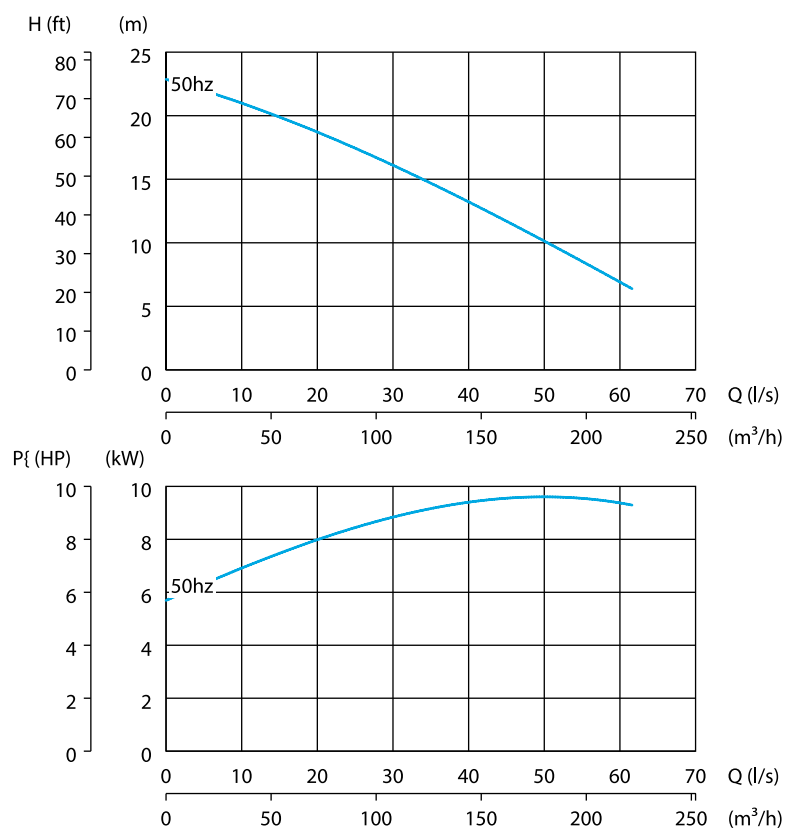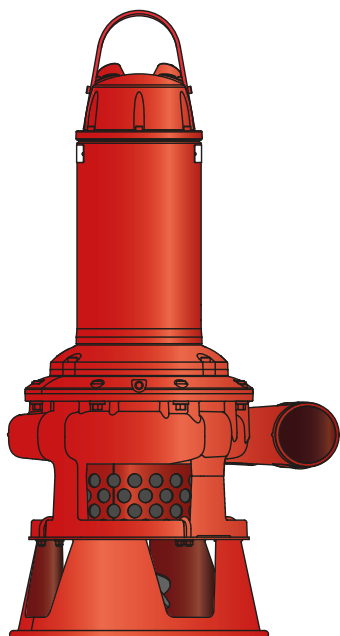

Technical Data 50 Hz	Bravo 400
Discharge connection	4"
Rated power P2	13.5 kW
Max. power consumption P1	16 kW
Shaft speed	1455 rpm
Rated current at 230V	47 A
Rated current at 400V	28 A
Rated current at 500V	21 A
Solids passage with agitator	30 mm
Height	1148 mm
Diameter	595 mm
Weight	231 kg

## BRAVO 500



8149.020

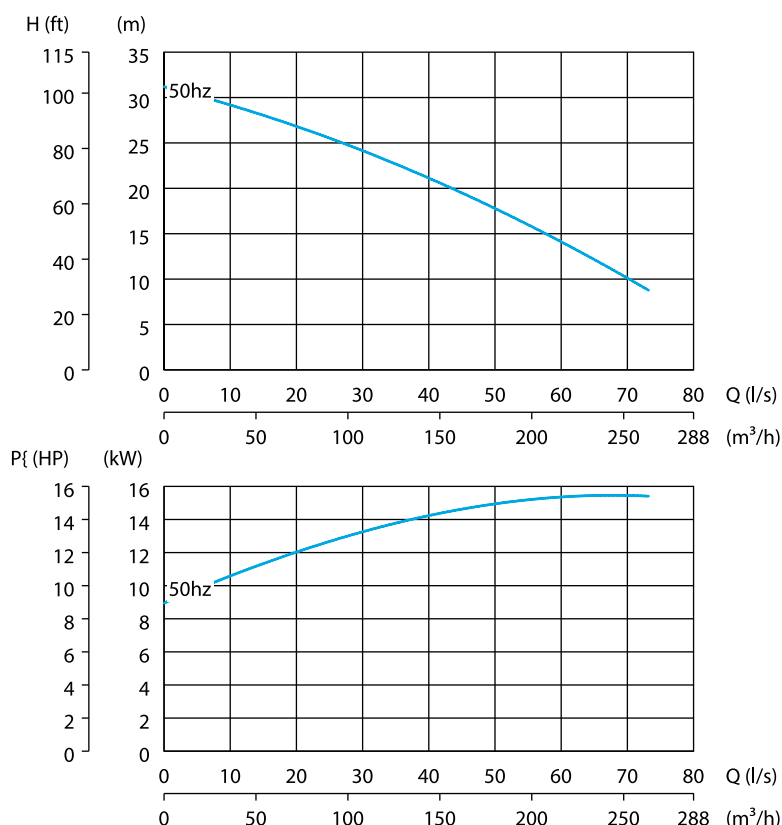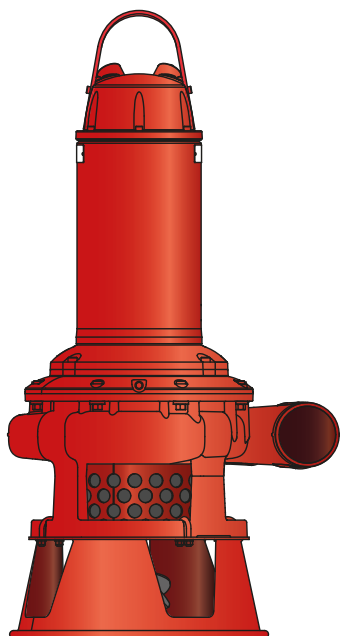

Technical Data 50 Hz	Bravo 500
Discharge connection	4"
Rated power P2	18 kW
Max. power consumption P1	21 kW
Shaft speed	1460 rpm
Rated current at 230V	62 A
Rated current at 400V	36 A
Rated current at 500V	29 A
Solids passage with agitator	40 mm
Height	1273 mm
Diameter	595 mm
Weight	293 kg

## BRAVO 600



8150.020

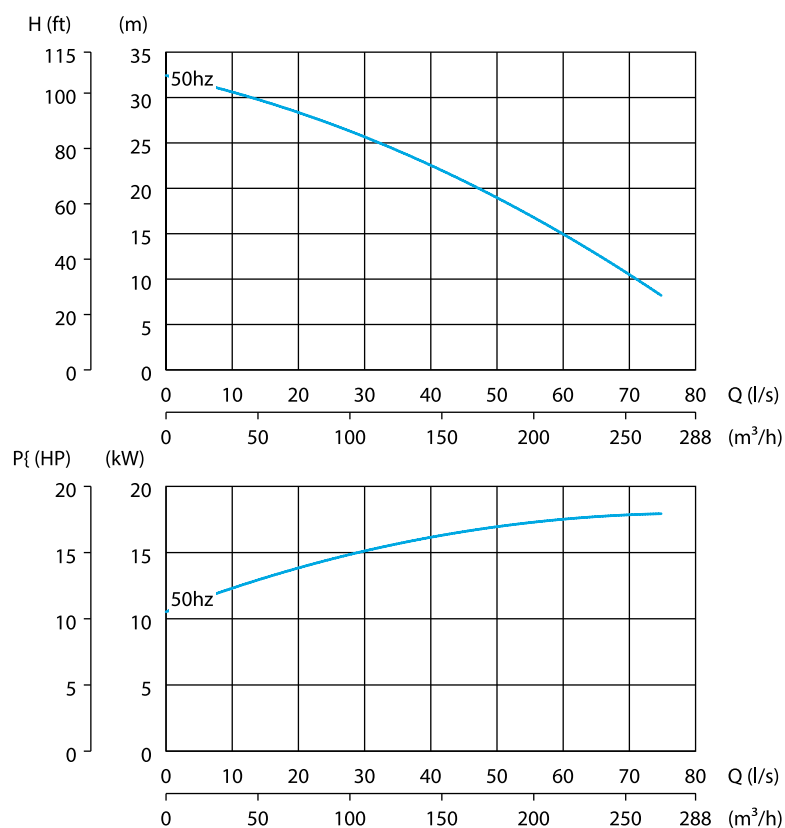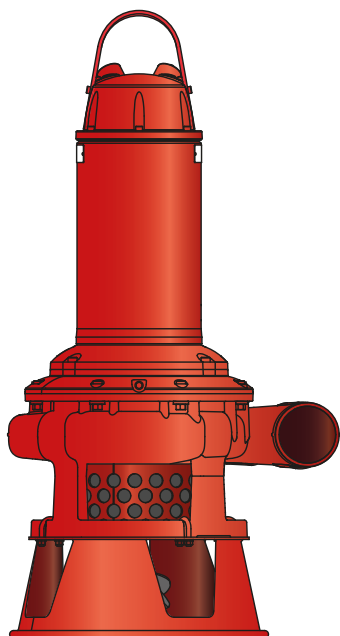

Technical Data 50 Hz	Bravo 600
Discharge connection	4"
Rated power P2	22 kW
Max. power consumption P1	25 kW
Shaft speed	1460 rpm
Rated current at 230V	73 A
Rated current at 400V	41 A
Rated current at 500V	33 A
Solids passage with agitator	40 mm
Height	1273 mm
Diameter	595 mm
Weight	293 kg

## BRAVO 700

8151.020

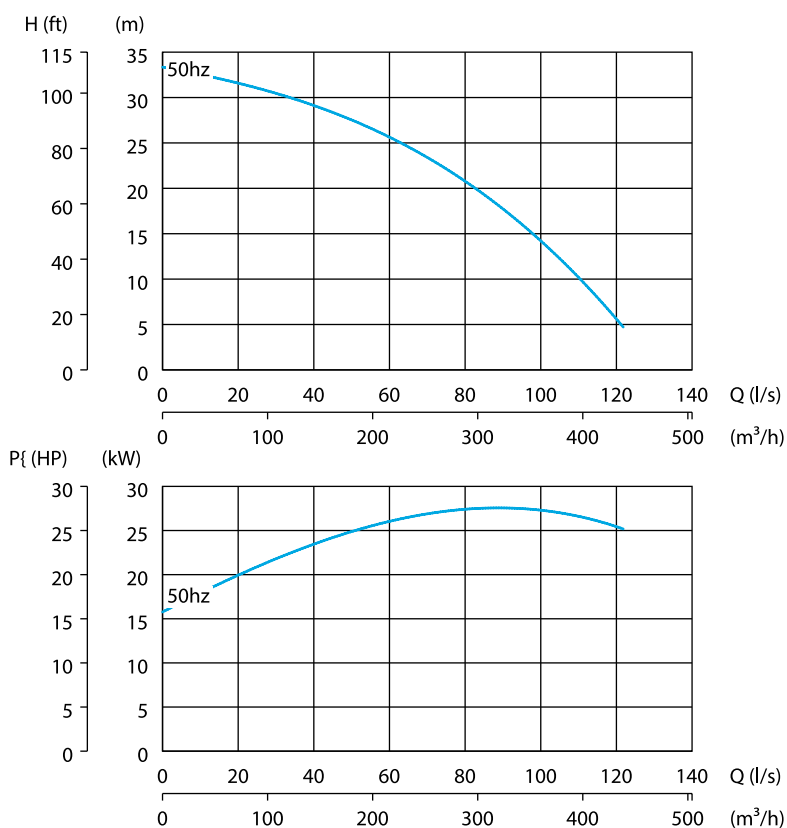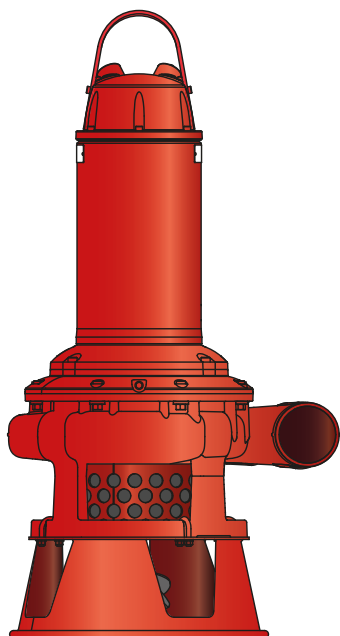



### Technical Data 50 Hz

### Bravo 700

Discharge connection	6"
Rated power P2	37 kW
Max. power consumption P1	40 kW
Shaft speed	1475 rpm
Rated current at 400V	66 A
Rated current at 500V	54 A
Solids passage with agitator	36 mm
Height	1652 mm
Diameter	875 mm
Weight	613 kg

## BRAVO 800

8152.020

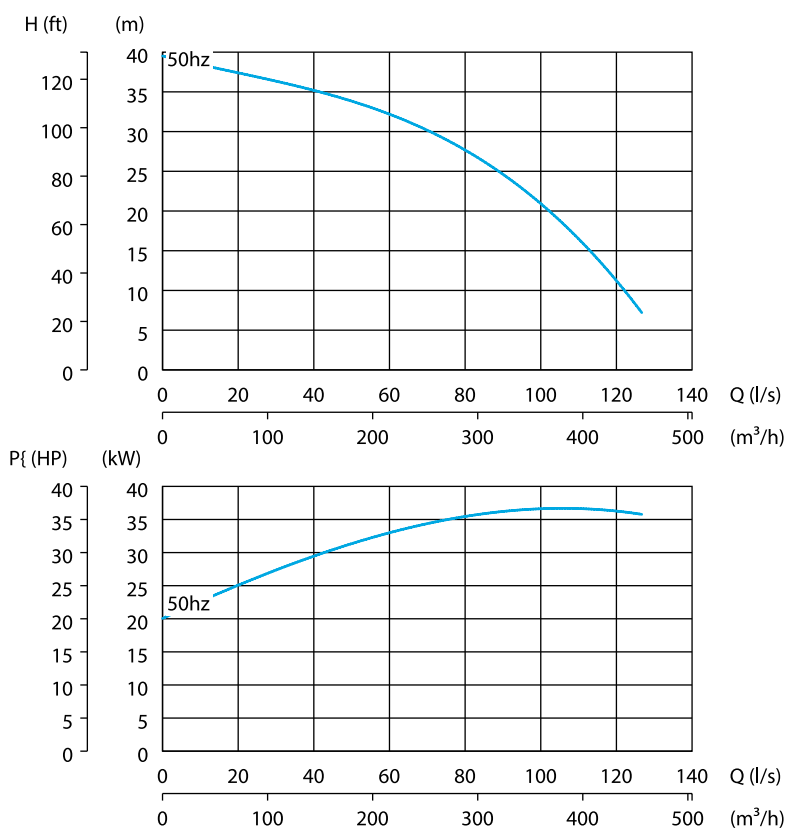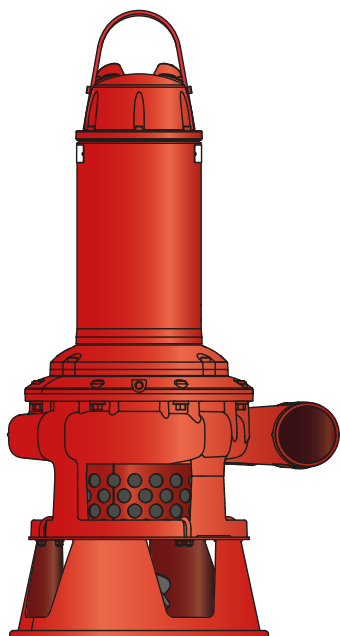



### Technical Data 50 Hz

### Bravo 800

Discharge connection	6"
Rated power P2	45 kW
Max. power consumption P1	49 kW
Shaft speed	1475 rpm
Rated current at 400V	82 A
Rated current at 500V	63 A
Solids passage with agitator	36 mm
Height	1652 mm
Diameter	875 mm
Weight	613 kg

## BRAVO 900

8153.020

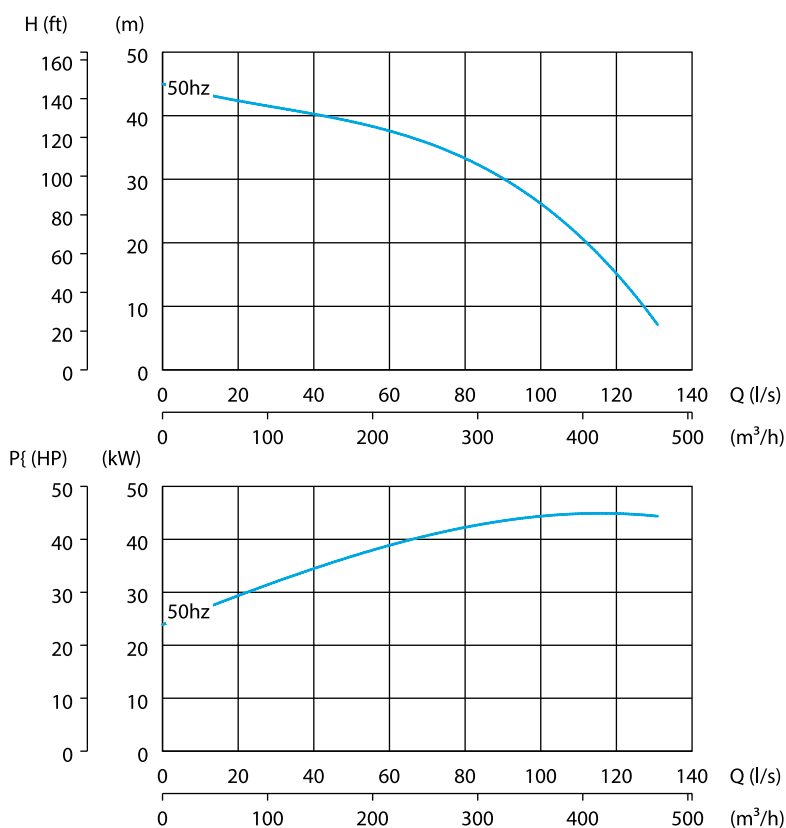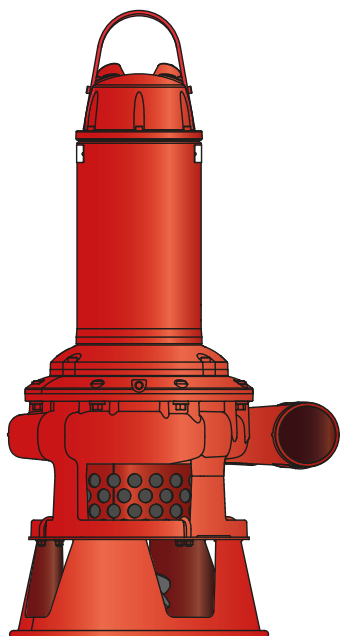

### Technical Data 50 Hz

### Bravo 900

Discharge connection	6"
Rated power P2	70 kW
Max. power consumption P1	75 kW
Shaft speed	1475 rpm
Rated current at 400V	132 A
Rated current at 500V	102 A
Solids passage with agitator	36 mm
Height	1779 mm
Diameter	875 mm
Weight	845 kg



## Materials in slurry pumps

Material	Bravo 200	Bravo 300	Bravo 400	Bravo 500	Bravo 600	Bravo 700	Bravo 800	Bravo 900
<b>Drive unit</b>								
Cast iron	●	●	●	●	●	●	●	●
<b>Suction cover</b>								
Nitrile rubber	●	●	—	—	—	—	—	—
<b>Pumphousing</b>								
Cast iron	●	●	—	—	—	—	—	—
Hard-Iron™	—	—	●	●	●	●	●	●
<b>Discharge connection type</b>								
Thread or hose connection	●	●	—	—	—	—	—	—
Victualic connection	—	—	○	○	○	○	○	○
<b>Agitator</b>								
Hard-Iron™	—	—	●	●	●	●	●	●

## Materials in slurry pumps

Material	Bravo 200	Bravo 300	Bravo 400	Bravo 500	Bravo 600	Bravo 700	Bravo 800	Bravo 900
<b>Impeller</b>								
Hard-Iron™	●	●	●	●	●	●	●	●
<b>Lifting handle</b>								
Galvanised steel	●	●	—	—	—	—	—	—
Stainless steel	—	—	●	●	●	●	●	●
<b>Motor shaft</b>								
Stainless steel	●	●	●	●	●	●	●	●
<b>Studs, screws and nuts</b>								
Stainless steel	●	●	●	●	●	●	●	●